


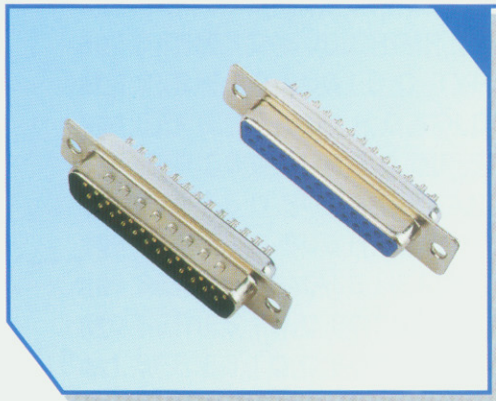

100 series

D-SUB SOLDER TYPE

Position	A	B	C	D	E
9	16.92	24.99	30.81	19.36	16.33
15	25.25	33.32	39.14	27.64	24.66
25	38.96	47.04	53.04	41.08	38.38
37	55.42	63.50	69.32	57.38	54.84

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

100 -09 P C B N S

SERIES NO: 1

NO.OF PINS: 2 3 4 5 6 7

CONTACT TYPE:
 P-MALE
 S-FEMALE



SHELL PLATED:
 C-CHROMATED SHELL
 T-TIN SHELL

PIN TYPE:
 S-STAMPED PIN

OPTION ON SCREW:
 N-W/O SCREWS
 Y-WITH SCREW(4-40UNC)

OPION ON INSULATOR:
 B-BLUE
 K-BLACK
 W-WHITE

[MALE]



[FEMALE]

