


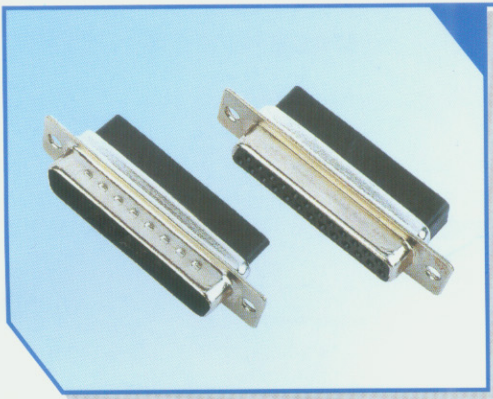

# 102 series

## D-SUB CRIMP TYPE

| Position | A     | B     | C     | D     | E     |
|----------|-------|-------|-------|-------|-------|
| 9        | 17.78 | 24.99 | 31.04 | 19.28 | 16.33 |
| 15       | 26.15 | 33.32 | 39.24 | 27.64 | 24.66 |
| 25       | 39.94 | 47.04 | 53.04 | 41.08 | 38.38 |


### Specifications:

Contact Resistance: 30m  $\Omega$  max.at DC 100 mA  
 Insulator Resistance: 1000M  $\Omega$  min.at DC 500V  
 Current Rating: 5AMP



### Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55° C--+105° C  
 Contact: Brass or Phosphor Bronze  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

### How To Order

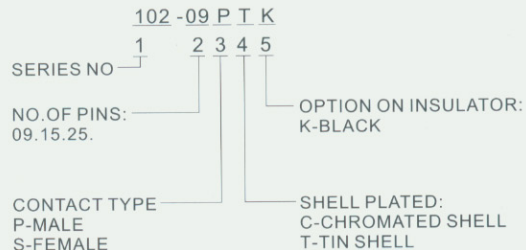

### [ MALE ]



### [ FEMALE ]

