

108 series

D-SUB H.D. RIGHT ANGLE TYPE (3.08mm 9.4mm)

Position	A	B	C	D	E
15	31.04	17.78	2.29	24.99	16.33
26	39.24	26.15	2.29	33.32	24.66
44	53.04	39.94	2.29	47.04	38.38
62	69.62	56.56	2.41	63.50	54.84

	F	G	H
B	3.08	5.08	14.45
C	9.4	10.89	22.2

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

108 - 15 S T K A B
 1 2 3 4 5 6 7

SERIES NO. — 1 —

NO.OF PINS: — 2 3 4 5 6 7 —

CONTACT TYPE
 P-MALE
 S-FEMALE


SHELL PLATED:
 C-CHROMATED SHELL
 T-TIN SHELL

B-3.08mm FOOTPRINT
 C-9.4mm FOOTPRINT

MOUNTING TYPE:
 A-A TYPE, WITH JACK
 SCREW & BOARD LOCKS
 K-K TYPE, WITH 4-40 INSERT
 & BOARD LOCKS

OPTION ON INSULATOR:
 B-BLUE
 K-BLACK
 W-WHITE

[MALE]

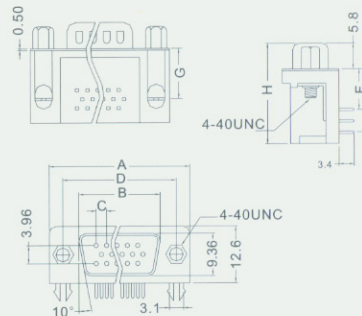

[FEMALE]

