

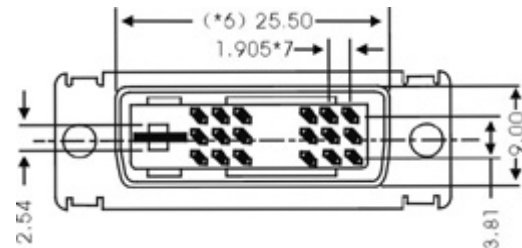



DS1086 SERIES



MATERIAL

- ◆Contact Resistance:25Ωmax
- ◆Insulator Resistance:5000MΩmin.at DC 500V
- ◆Rated current:3AMP
- Dielectric With standing
- ◆Voltage:AC 1000V For 1 minute
- ◆Contact:Brass
- ◆Housing:PBT&30% Glass Fiber(UL 94V-0)

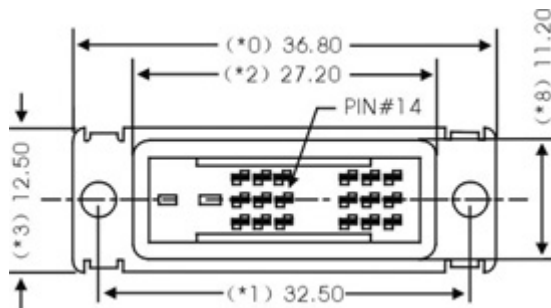

Ordering information

Series No .	COLOR OF HOUSING	CONTACT PLATED	SHELL PLATED
Ds1086	W	T	1
	W:WHITE K:BLACK B:BLUE	T:TIN PLATED G:GOLD PLATED	1:CHROMATED SHELL 2:TIN SHELL